

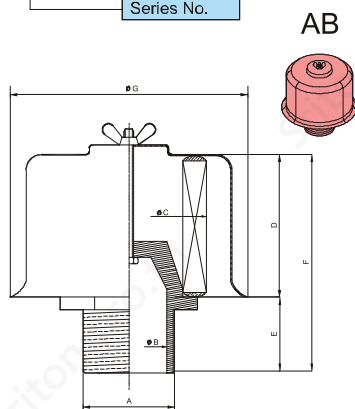


AB Series-Air Breather

Ordering Code



High capacity air filters
Threaded Connection: PT, BSP and NPT.
Port Size from 3/4" to 4"
Filtration: 40 micron




Ratings

Series	A PT (Rc)	B mm (in)	C mm (in)	D mm (in)	E mm (in)	F mm (in)	G mm (in)	Air Flow m ³ /min	Filtration Micron	Weight kg (lb)
AB-06	3/4"	18 (.70)	65 (2.55)	45 (1.77)	37 (1.45)	88 (3.46)	100 (3.93)	0.35	40	0.24 (.53)
AB-08	1"	25 (.98)	65 (2.55)	45 (1.77)	34 (1.33)	86 (3.38)	100 (3.93)	0.45	40	0.24 (.53)
AB-12	1 1/2"	39 (1.53)	92 (3.62)	90 (3.54)	43 (1.69)	143 (5.62)	126 (4.96)	1.7	40	0.56 (1.24)
AB-16	2"	48 (1.88)	92 (3.62)	90 (3.54)	42 (1.65)	140 (5.51)	126 (4.96)	2.1	40	0.58 (1.28)
AB-20	2 1/2"	64 (2.51)	130 (5.11)	120 (4.72)	47 (1.85)	178 (7.00)	170 (6.69)	3.5	40	1.12 (2.48)
AB-24	3"	72 (2.83)	130 (5.11)	120 (4.72)	48 (1.88)	178 (7.00)	170 (6.69)	4.6	40	1.14 (2.53)
AB-32	4"	95 (3.74)	170 (6.69)	140 (5.51)	57 (2.24)	211 (8.30)	215 (8.46)	7.1	40	1.88 (4.17)

SONPIN® Filler Breather Filters

裝置於油箱上方，做為注油過濾和空氣呼吸器的功能。

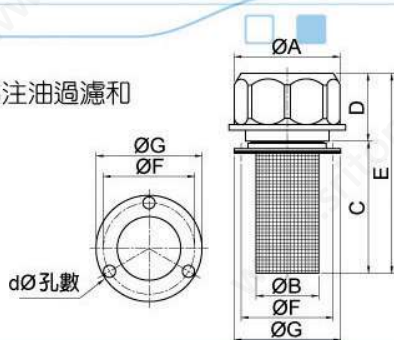

型式 Type	口徑 (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	d x 孔數 Hole	重量 Weight (kg)
SP-06	32	53	31	65	34	99	45.5	53	Ø6 x 3 孔	0.09
SP-06 (S)	32	53	31	65	34	99	45.5	53	Ø6 x 3 孔	0.09
SY-08	50	80	48	95	50	147	71	82	Ø6 x 6 孔	0.26
SY-08 (S)	50	80	48	95	50	147	71	82	Ø6 x 6 孔	0.26
SY-10	50	80	49	150	52	187	78	88	Ø6 x 4 孔	0.30
CB-16 直口	53	85	46	120	38	158	For Tank Side Using / Welding (焊接式)			0.60
CB-16 斜口	53	85	46	120	38	158				0.61