Baskı	Değişiklik Form no / Change Form no	Degisikler / Change Record	Çizen Drawn By	Tarih/Date	Onay Approve
A00	-	YENİ YAYIN	Z.A.	10.09.2018	U.Y.

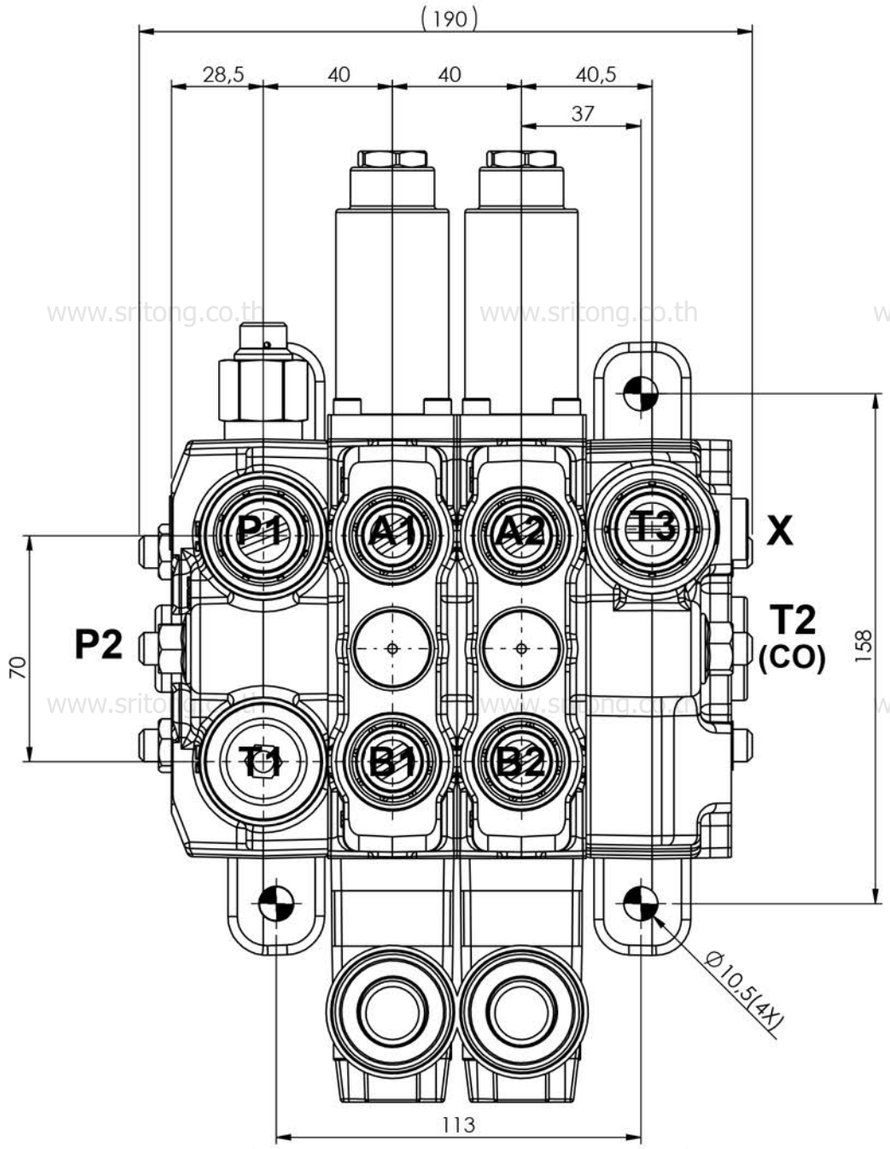

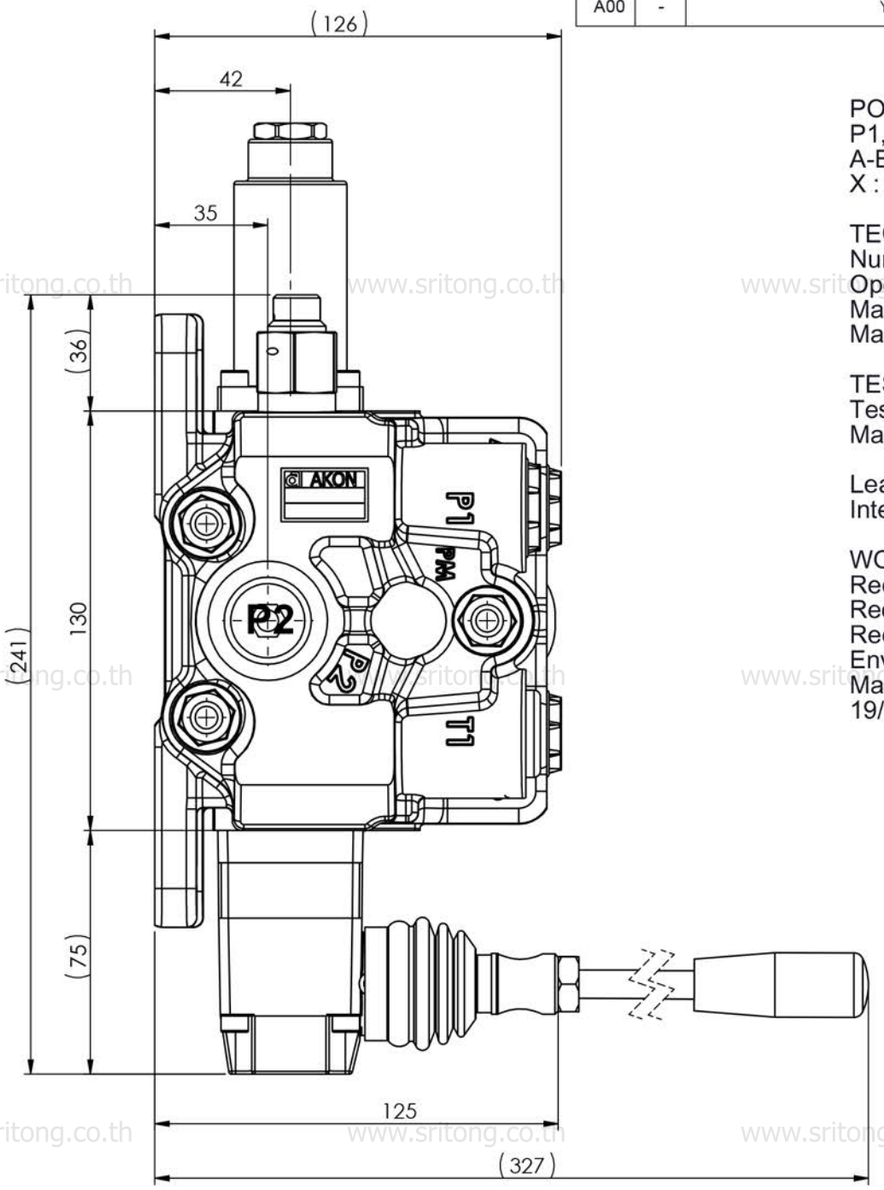

PORT SIZE:
P1, P2, T1, T2, T3 : G3/4"
A-B : G1/2"
X : G1/4"

TECHNICAL SPECIFICATIONS:
Number of spool : 2
Operating Pressure : 180 Bar
Max. Operating Pressure : 315 Bar
Max. Back Pressure : 30 Bar

TEST SPECIFICATIONS :
Test with Petroleum SAE32 Hydraulic Oil at 40±2°C
Main Relief Valve to be Set 180 Bar At 16 lt/min

Leakage Rates
Internal leakage of 4 to 10cc/min. at 100 Bar 32cST 40°C

WORKING CONDITIONS:
Recommended Oil Viscosity Range :10 cSt to 75 cSt
Recommended Oil Filtering : β10 ≥ 75
Recommended Fluid Tempe.Range : -20°C to +80°C
Enviromental Temperature Range : -35°C to +60°C
Max.Contamination Level: Class 10 (NAS 1638
19/16(ISO 4406)

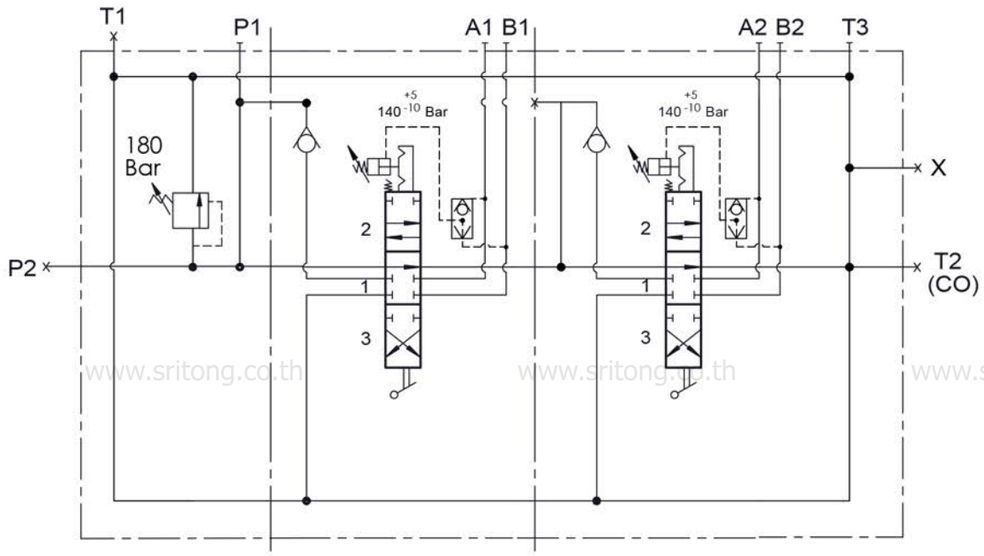

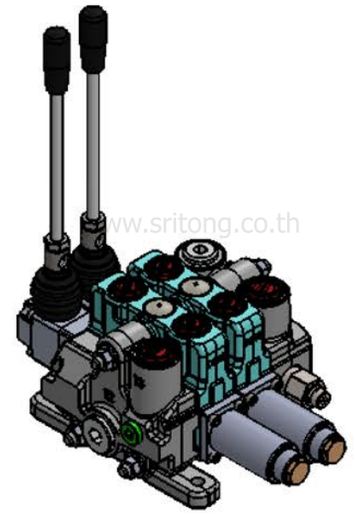

VALF KV172
/IL-001(180)-C01
/BSC29ST27
/TBSC29ST27
/C

				Notlar/Notes	RESİM ÜZERİNDEN ÖLÇÜ ALINMAZ/DONT SCALE THIS DRAWING ELDE DEĞİŞİKLİK YAPILMAZ ALL CHANGES MUST BE DONE ON THE CAD SYSTEM			
				Tarih/Date	Imza/Sign	Ölçek/Scale	-	Yüzey Koruma Surface Protection	-	Montaj No Assembly No
Çizen Drawn By	Z.A			10.09.2018		Malzeme Material	-			
Kontrol Checked By	S.Y.					Resim No Dwg.No	TRKV172-0326			A3
Onay Approved By	U.Y.					Parça Adı Part Name	VALF KV172			Sayfa/Page 1/1

AKON HIDROLIK VALF SAN. VE TIC. A.S.
A.O.S.B.10000 Sk.No: 22 Çiğli/IZMIR/TURKEY

Bu dökümanların tüm hakları AKON Hidrolik Valf San. ve Tic. A.Ş.' ye aittir.AKON HIDROLIK VALF SAN. VE TİC. A.Ş.'nin izni olmadan kısmen veya tamamen kullanılamaz, çoğaltılamaz. 3. şahıslara verilemez.
All rights of this documents are the property of AKON HYDRAULIC VALVE CO. It can not be used, copied, reproduced, made available to any third party in whole or part without written permission of AKON HYDRAULIC VALVE CO.