

25






洩壓閥 Relief Valve

TYPE:ROP-1VB / 2VB/ 2VD

彈簧 No	使用壓力範圍
No. 1L	0.8 ~ 4.6
No. 2L	4.6 ~ 13
No. 3L	13 ~ 25
No. 4L	0 ~ 25

上記：彈簧の壓力範圍

流量：15l/min潤滑油#140

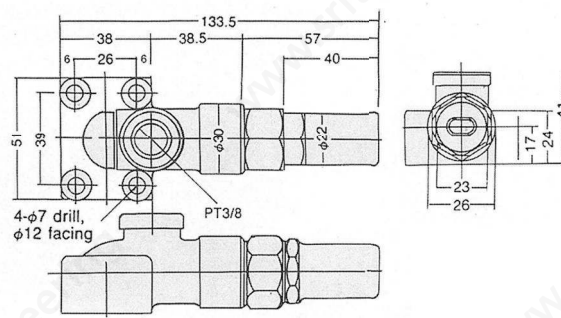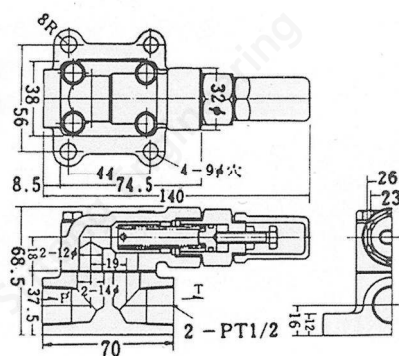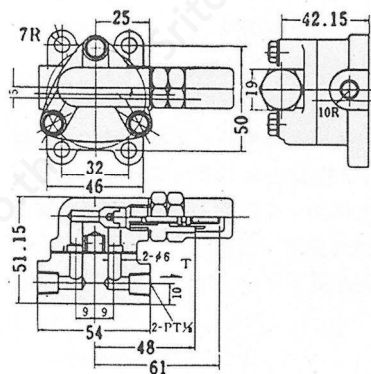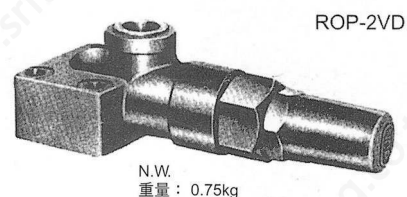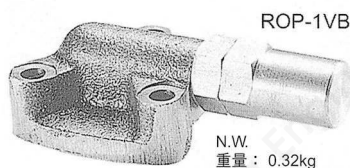

26

Self Priming Pump TYPE: DP-1/2/3/4

Under Water Pump TYPE: RY-130 - 280

對角孔

1/2HP~215

1HP~215


DP





對角孔

1/2HP~170

1HP~185

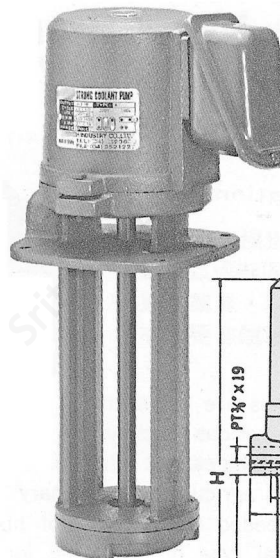

RY

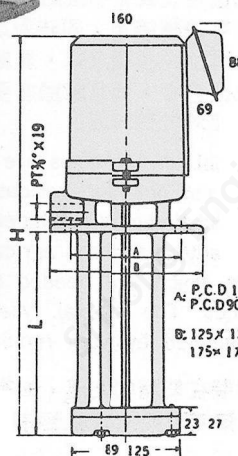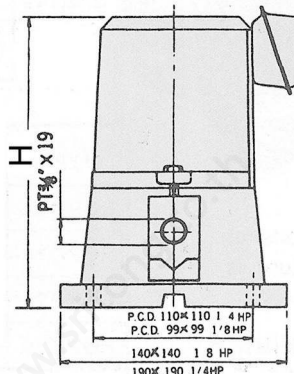

Specifications

This is the "WLP" Brand pump in best quality with anti-rust treatment, use high grade material for the complete set and has been duly inspected in five steps by precision electron device before delivery, Voltage, Insulation and Repression are in accordance with standard.

We sincerely recommend this pump for your kind attention, if there is any question, please do not hesitate to contact us, we are always with pleasure to be of service.

Type	Power (HP)	H (mm)	Flow (l/Min)	Voltage
DP-1 (DS08)	1/8	180	28	3 phase, 4P 220/380V:220/440V
DP-2 (DS25)	1/4	240	86	
DP-3 (DS50)	1/2	290	170	
DP-4 (DS100)	1	300	200	

Type	Power (HP)	H (mm)	L (mm)	Flow (l/Min)	Voltage	Outlet	Head (meter)
RY-130 (DV0813)	1/8	280	130	27	110/220V:220/380V:220/440V	3/8"	2
RY-150 (DV0815)	1/8	300	150	26	110/220V:220/380V:220/440V	3/8"	2
RY-180 (DV0818)	1/8	330	180	24	110/220V:220/380V:220/440V	3/8"	2
RY-160 (DV2516)	1/4	210	160	88	220/380V:220V/440V	1/2"	4
RY-200 (DV2520)	1/4	250	200	86	220/380V:220V/440V	1/2"	4
RY-270 (DV2527)	1/4	340	270	84	220/380V:220V/440V	1/2"	4
RY-250 (DV5025)	1/2	455	250	120	220/380V:220V/440V	3/4"	4
RY-280 (DV10028)	1	540	280	170	220/380V:220V/440V	1"	4